

2023-2024 TÜRKİYE İNTERCITY FERDİ BOWLING BAHAR LİGİ YAĞLAMA DESENLERİ

LC 100, EZ Touch ve PHOENIX Yağlama Makinesi AMF – BRUNSWICK – SWITCH ve diğer sentetik lane'ler

LC 100, EZ Touch ve PHOENIX ile yağlanacak salonlarda yağlama uzunluğu : 40 Feet

Yağlama makinesinde keçenin üzerindeki film sıralaması:

0,5 - 0,4 - 0,3 - 0,2 - 0,2 - 0,2 - 0,2 - 0,3 - 0,4 - 0,5 mm. kalınlıkta olacaktır.


Keçenin ve rulonun baskısı (**D**) seviyesine ayarlanacak ve yağlama double yapılacaktır.

CROSSFIRE makine için yağlama uzunluğu: 39 Feet

CROSSFIRE PROGRAM SETTINGS

MENU DESCRIPTION	PROGRAM 2	CHANGE	CHANGE	CHANGE
START CLEANING DISTANCE	0			
OIL ONLY DUST (YES or NO)	NO			
OIL DISTANCE (FEET)	39			
FORWARD SHIFT TO 2ND (FEET)	20			
FORWARD SHIFT TO HIGH (FEET)	39			
ZONE 1 PADS OFF (INCHES)	60			
ZONE 2 PADS OFF (INCHES)	72			
ZONE 3 PADS OFF (FEET)	30			
FWD BUFF DISTANCE (FEET)	39			
REVERSE SHIFT 2ND (FEET)	25			
REVERSE SHIFT TO LOW (FEET)	15			
DROP BRUSH IN REVERSE (FEET)	39			
ZONE 3 PADS ON (FEET)	25			
ZONE 2 PADS ON (INCHES)	0			
ZONE 1 PADS ON (INCHES)	0			
REVERSE BUF (FEET)	0			
SPRAY ON TIME (TENTHS)	3			
SPRAY OFF DISTANCE (INCHES)	33			
LAST SPRAY (FEET)	52			
DECK SPRAY (YES or NO)	NO			
FWD SUBTRACT DISTANCE (INCHES)	30			
REV SUBTRACT DISTANCE (INCHES)	30			
TYPE OF CLEANER				
TYPE OF CONDITIONER				

Authority 22 için:

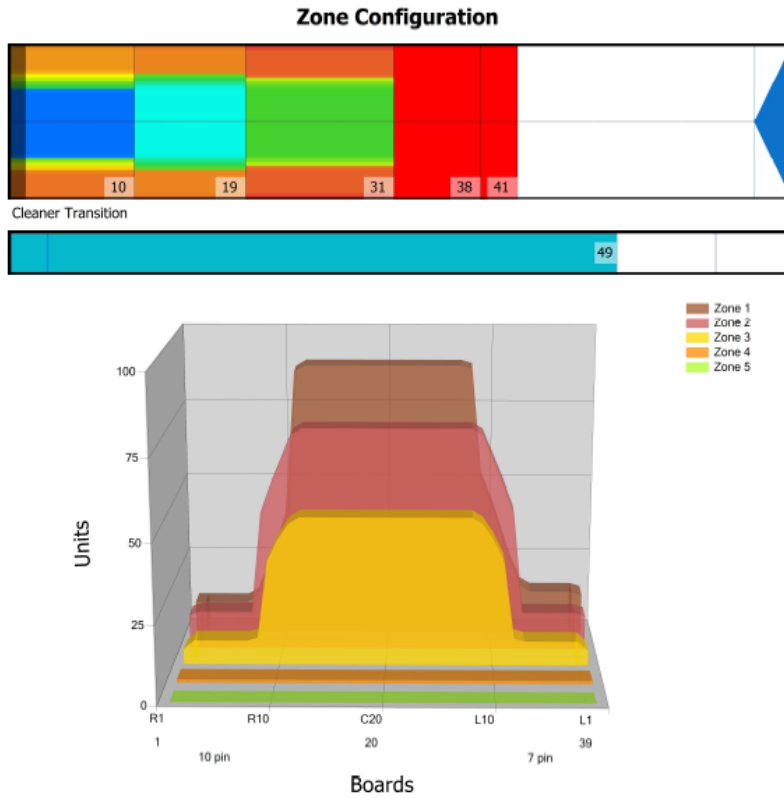

Volume: 21.38
Speed: Quick clean
Start squeegee: 0 feet
Split pattern: No

Mode: Clean and condition
Start cleaner spray: 0 feet
Start conditioning: 12 inches

Zone 1	Avg	Ratio
Left	14.40	6.18 : 1
Right	10.40	8.56 : 1
Center	89.00	


Zone 2	Avg	Ratio
Left	12.00	6.00 : 1
Right	12.00	6.00 : 1
Center	72.00	

Zone 3	Avg	Ratio
Left	8.00	6.00 : 1
Right	8.00	6.00 : 1
Center	48.00	

Zone 4	Avg	Ratio
Left	1.00	1.00 : 1
Right	1.00	1.00 : 1
Center	1.00	

Zone 5	Avg	Ratio
Left	0.00	1.00 : 1
Right	0.00	1.00 : 1
Center	0.00	

Volume by Board

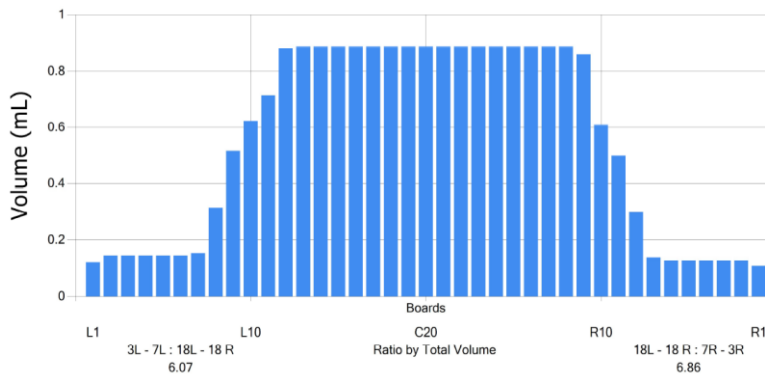

AMF hatlar için KEGEL makine:




Türkiye Bowling Ligleri



Oil Pattern Distance	42	Reverse Brush Drop	38	Oil Per Board	50 ul
Forward Oil Total	12.75 mL	Reverse Oil Total	13.1 mL	Volume Oil Total	25.85 mL
Tank Configuration	A Only	Tank A Conditioner	ICE	Tank B Conditioner	ICE

	START	STOP	LOADS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	2	10	A	74	0.0	1.4	1.4	3700
2	7L	7R	1	14	A	27	1.4	3.3	1.9	1350
3	10L	10R	3	14	A	63	3.3	9.2	5.9	3150
4	11L	11R	3	18	A	57	9.2	16.8	7.6	2850
5	12L	12R	2	18	A	34	16.8	21.9	5.1	1700
6	2L	2R	0	18	A	0	21.9	28.0	6.1	0
7	2L	2R	0	26	A	0	28.0	34.0	6.0	0
8	2L	2R	0	30	A	0	34.0	42.0	8.0	0


	START	STOP	LOADS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	30	A	0	42.0	34.0	-8.0	0
2	13L	13R	1	18	A	15	34.0	31.5	-2.5	750
3	12L	12R	3	18	A	51	31.5	23.9	-7.6	2550
4	11L	11R	3	18	A	57	23.9	16.3	-7.6	2850
5	10L	10R	2	18	A	42	16.3	11.2	-5.1	2100
6	9L	9R	1	18	A	23	11.2	8.7	-2.5	1150
7	2L	2R	2	14	A	74	8.7	4.8	-3.9	3700
8	2L	2R	0	10	A	0	4.8	0.0	-4.8	0

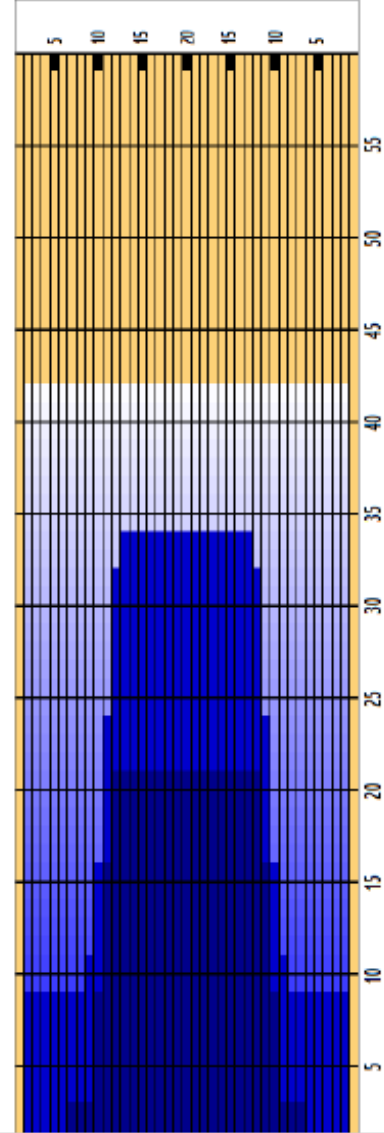


Cleaner Ratio Main Mix NA Forward
 Cleaner Ratio Back End Mix NA Reverse
 Cleaner Ratio Back End Distance NA Combined



Buffer RPM: 4 = 700 | 3 = 500 | 2 = 200 | 1 = 100

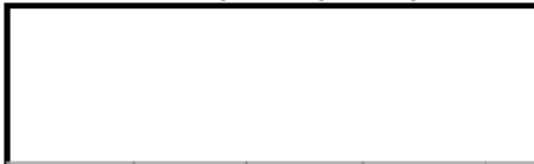

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside/Middle	Middle/Middle	Inside/Middle	Middle/Inside	Middle/Middle	Middle/Outside
Track Zone Ratio	5:40	1:09	1	1	1:09	5:40

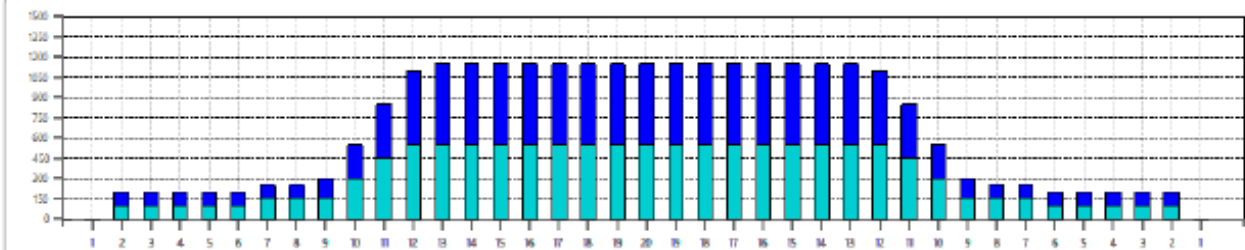

Bruswick hatlar için KEGEL makine:




Türkiye Bowling Ligleri



Oil Pattern Distance	41	Reverse Brush Drop	38	Oil Per Board	50 ul
Forward Oil Total	12.75 mL	Reverse Oil Total	13.1 mL	Volume Oil Total	25.85 mL
Tank Configuration	A Only	Tank A Conditioner	ICE	Tank B Conditioner	ICE

START	STOP	LOADS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	2L 2R	2	10	A	74	0.0	1.4	1.4	3700
2	7L 7R	1	14	A	27	1.4	3.3	1.9	1350
3	10L 10R	3	14	A	63	3.3	9.2	5.9	3150
4	11L 11R	3	18	A	57	9.2	16.8	7.6	2850
5	12L 12R	2	18	A	34	16.8	21.9	5.1	1700
6	2L 2R	0	18	A	0	21.9	28.0	6.1	0
7	2L 2R	0	26	A	0	28.0	41.0	13.0	0

START	STOP	LOADS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	2L 2R	0	30	A	0	41.0	34.0	-7.0	0
2	13L 13R	1	18	A	15	34.0	31.5	-2.5	750
3	12L 12R	3	18	A	51	31.5	23.9	-7.6	2550
4	11L 11R	3	18	A	57	23.9	16.3	-7.6	2850
5	10L 10R	2	18	A	42	16.3	11.2	-5.1	2100
6	9L 9R	1	18	A	23	11.2	8.7	-2.5	1150
7	2L 2R	2	14	A	74	8.7	4.8	-3.9	3700
8	2L 2R	0	10	A	0	4.8	0.0	-4.8	0

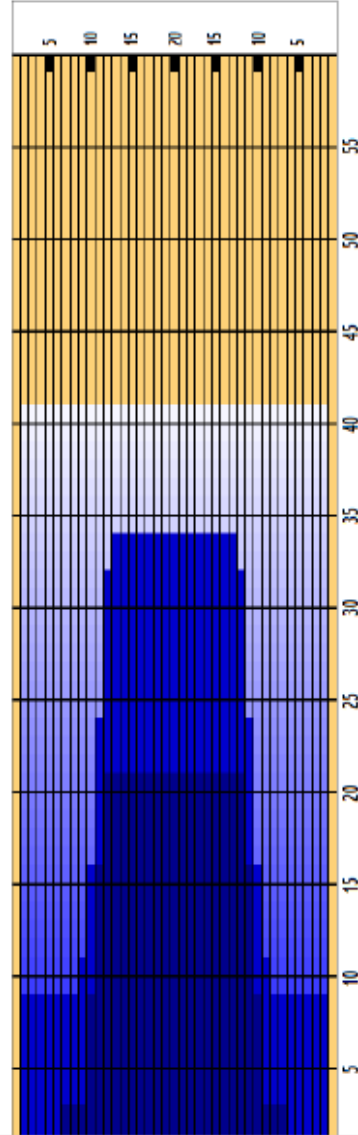


Cleaner Ratio Main Mix NA Forward
 Cleaner Ratio Back End Mix NA Reverse
 Cleaner Ratio Back End Distance NA Combined



Buffer RPM: 4 = 700 | 3 = 500 | 2 = 200 | 1 = 100



Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside:Middle	Middle:Middle	Inside:Middle	Middle:Inside	Middle:Middle	Middle:Outside
Track Zone Ratio	5.40	1.89	1	1	1.89	5.40

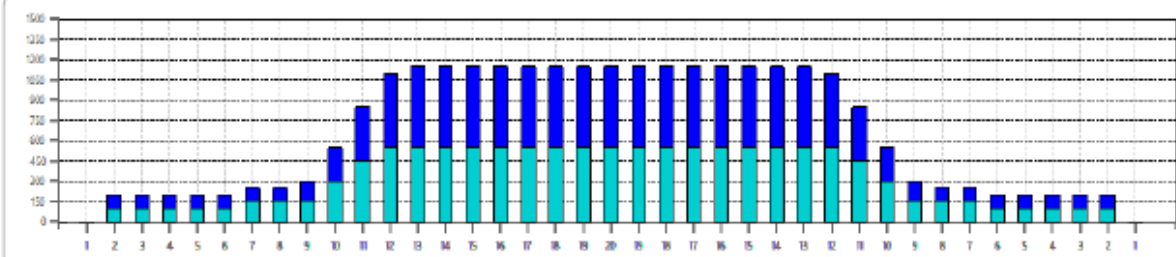

Switch hatlar için KEGEL makine:



Türkiye Bowling Ligleri



Oil Pattern Distance	41	Reverse Brush Drop	36	Oil Per Board	50 ul
Forward Oil Total	12.75 mL	Reverse Oil Total	13.1 mL	Volume Oil Total	25.85 mL
Tank Configuration	A Only	Tank A Conditioner	ICE	Tank B Conditioner	ICE

	START	STOP	LOADS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	2	10	A	74	0.0	1.4	1.4	3700
2	7L	7R	1	14	A	27	1.4	3.3	1.9	1350
3	10L	10R	3	14	A	63	3.3	9.2	5.9	3150
4	11L	11R	3	18	A	57	9.2	16.8	7.6	2850
5	12L	12R	2	18	A	34	16.8	21.9	5.1	1700
6	2L	2R	0	18	A	0	21.9	28.0	6.1	0
7	2L	2R	0	26	A	0	28.0	41.0	13.0	0

	START	STOP	LOADS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	30	A	0	41.0	34.0	-7.0	0
2	13L	13R	1	18	A	15	34.0	31.5	-2.5	750
3	12L	12R	3	18	A	51	31.5	23.9	-7.6	2550
4	11L	11R	3	18	A	57	23.9	16.3	-7.6	2850
5	10L	10R	2	18	A	42	16.3	11.2	-5.1	2100
6	9L	9R	1	18	A	23	11.2	8.7	-2.5	1150
7	2L	2R	2	14	A	74	8.7	4.8	-3.9	3700
8	2L	2R	0	10	A	0	4.8	0.0	-4.8	0

Cleaner Ratio Main Mix NA Forward
 Cleaner Ratio Back End Mix NA Reverse
 Cleaner Ratio Back End Distance NA Combined
 Buffer RPM: 4 = 700 | 3 = 500 | 2 = 200 | 1 = 100



Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside/Middle	Middle/Middle	Inside/Middle	Middle/Inside	Middle/Middle	Middle/Outside
Track Zone Ratio	5.48	1.89	1	1	1.89	5.48

